

# MR240

## Machine-Mounted Display for Site Prep



- ④ Accurate grade control
- ④ Extra-strong attachment
- ④ Waterproof and very rugged
- ④ Low cost
- ④ Long battery life

**IDEAL FOR EXCAVATORS**



*The Level of Excellence*

# MR240 specifications



## MR240 Receiver

Ideal for use with backhoes and miniexcavators, this receiver offers the convenience of a machine-mounted display at an economical price.

The MR240 receiver provides accurate grade information for all visual machine control applications, with 240° detection of any rotating laser.

### FEATURES

- LED indicators show position of cutting edge in relation to the laser reference beam.
- Memory stores last signal received. LED arrows indicate which way to move the bucket to pick up the laser beam again.
- Choice of three settings: 3 channels (indicators) in coarse mode; 3 or 5 channels in fine.
- Magnetic mount allows quick mounting and easy movement from machine to machine.
- Automatic shutoff.
- Rugged, waterproof construction.
- Includes receiver, batteries, case.

## Application




MR240 attaches to excavator arm with extra strong rare earth magnets built into back plate.



**One-person operation saves time and money!** No grade checker is required and there's no expensive machine downtime while operator checks grade with a rod.

## LEDs indicate direction

Blinking LEDs point in the direction to move the bucket to reach grade. Color also tells you at a glance your position. 5 channels available in fine:

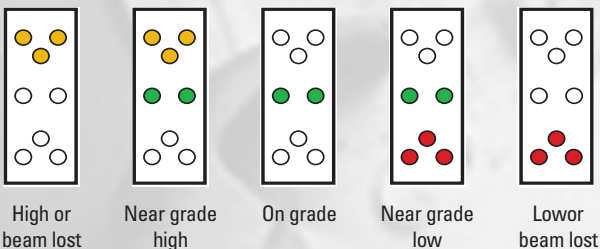

High or beam lost    Near grade high    On grade    Near grade low    Lower beam lost

## MR240 Specifications

Range	650 ft. (200 m) varies with laser used
Accuracy*	Fine: 1/4" (6 mm) Coarse: 1" (30 mm)
Capture height	6" (15 cm)
Reception angle	240 nominal
Battery life	approx. 130 hours - 3 AA alkaline
Attachment	Built-in magnet mount
Auto. shutoff	After 1 hour
Environmental	Waterproof (IP67)
Operating	temperature -18 to 158 F; (-28 to 70 C)
Size	8.5" x 5" x 4"; 4.8 lbs. (22 x12 x10 cm; 2.2kg)

\*Typical; actual accuracy depends on beam diameter and distance.

## AGL Corporation

2202 Redmond Rd., Jacksonville, AR 72076  
 sales@agl-lasers.com - www.agatec.com  
 Fax: 501.982.0880 - Phone: 501.982.4433  
 Toll Free: 800.643.9696



The Level of Excellence